

STEIN-diaphragm-wall-grab 1010

for the wall thickness 1000 / 1200 mm


with wire-rope-pulleys \varnothing 800 mm for wire-rope \varnothing 34 - 36 mm
two double sheaves and one single sheave

The diaphragm wall grab is low in maintenance and is subjected to the safety regulation VCB 9a for handling of loads.



The cutting edges of the grab jaws are made of Hardox steel 450 and were especially hardened. Easy mounting of the grab jaws for excavation widths 1000/1200 mm. All the grab teeth as well as all the wire rope pulleys are quickly exchangeable due to their construction as ready to use components.

Paintwork: aluminium coloured rust protection coating.




MFS Maschinenfabrik GmbH & Co KG

Production

Phone + 49 (0) 4421 1434 0
Fax + 49 (0) 4421 3034 81
E-mail info@mfs-mafa.de
Address Langeoogstr. 13
26384 Wilhelmshaven | Germany

Sale

Phone + 49 (0) 2323 9266 0
Fax + 49 (0) 2323 9266 25
E-mail kendlik@stein-ht.de
Address Schnittstr. 6
44653 Herne | Germany

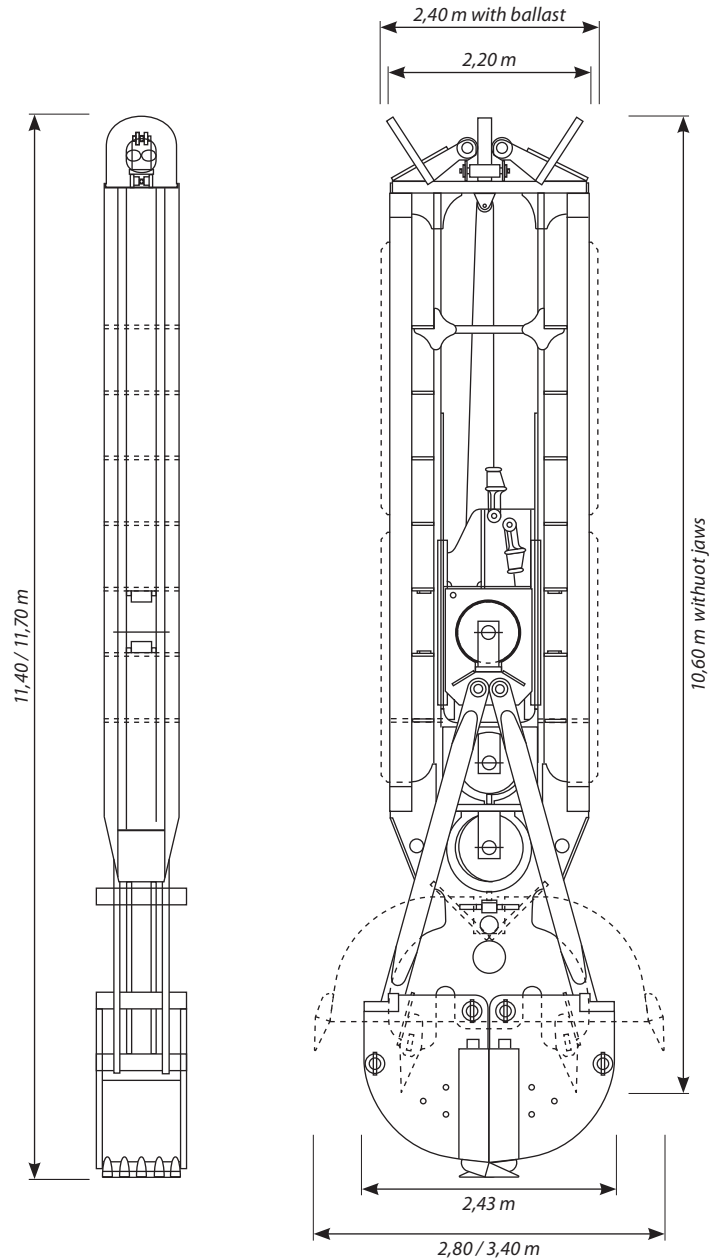

grab - body [kg]	18.400			
ballast weight [kg]	3.800			
light extension 1000 - 1200 mm [kg]	1.170			
jaws opening [mm]	2800		3400	
jaws width [mm]	1000	1200	1200	1300
jaws weight [kg]	2.900	3.600	3.000	4.000
overall weights minimal [kg]	21.300	23.170	21.400	23.570
overall weights maximal [kg]	25.100	26.970	25.200	27.370

Documentation: technical specification, instruction sheet, maintenance manual, sheaving diagram, spare-parts list, safety instructions.