

# STEIN-diaphragm-wall-grab K 610





for the wall thickness 600 / 800 / 1000 mm

with wire-rope-pulleys  $\varnothing$  600 mm for wire-rope  $\varnothing$  28 - 32 mm  
two double sheaves and one single sheave

The diaphragm wall grab is low in maintenance and is subjected to the safety regulation VCB 9a for handling of loads.

The cutting edges of the grab jaws are made of Hardox steel 450 and were especially hardened. Easy mounting of the grab jaws for excavation widths 600/800/1000 mm. All the grab teeth as well as all the wire rope pulleys are quickly exchangeable due to their construction as ready to use components.

Paintwork: aluminium coloured rust protection coating.

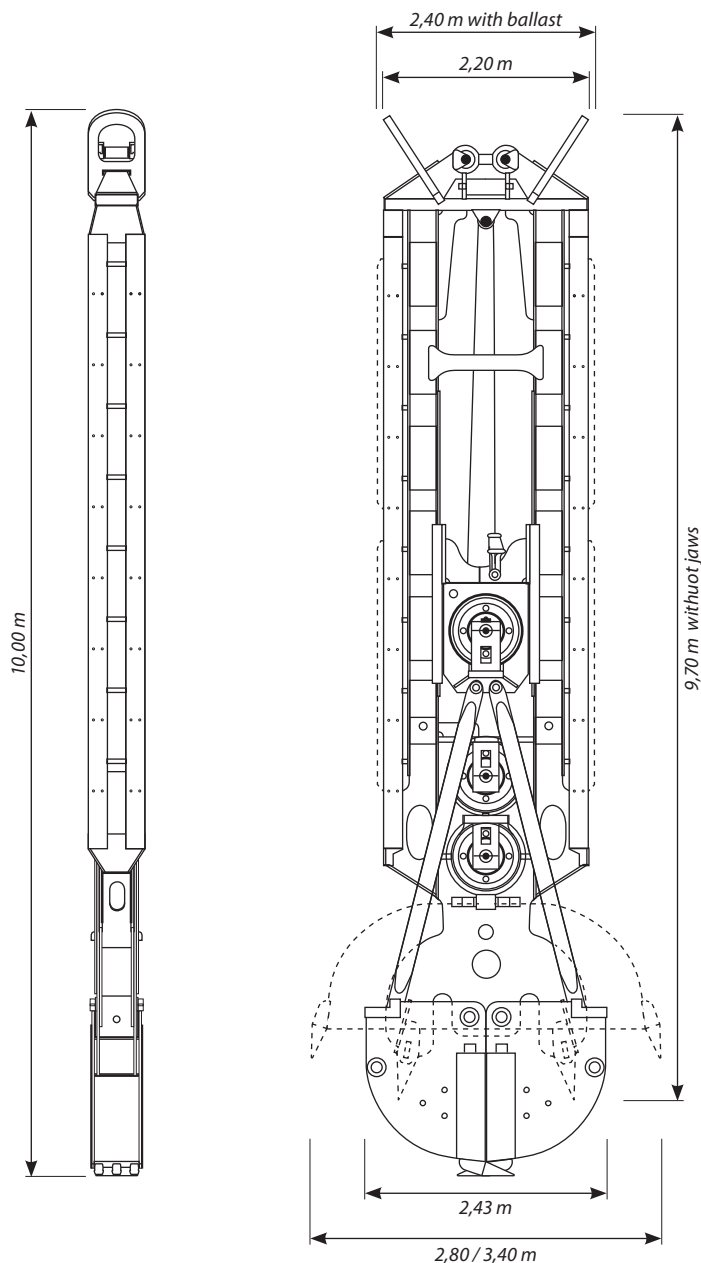

## MFS Maschinenfabrik GmbH & Co KG

### Production

Phone + 49 (0) 4421 1434 0  
 Fax + 49 (0) 4421 3034 81  
 E-mail info@mfs-mafa.de  
 Address Langeoogstr. 13  
 26384 Wilhelmshaven | Germany

### Sale

Phone + 49 (0) 2323 9266 0  
 Fax + 49 (0) 2323 9266 25  
 E-mail kendlik@stein-ht.de  
 Address Schnittstr. 6  
 44653 Herne | Germany

grab - body [kg]	10.550					
extension 600 - 800 mm [kg]	3.800					
light extension 600 - 800 mm [kg]	1.050					
light extension 600 - 1000 mm [kg]	2.000					
jaws opening [mm]	2800			3400		
jaws width [mm]	600	800	1000	600	800	1000
jaws weight [kg]	2.200	2.700	3.500	2.300	3.100	3.600
overall weights minimal [kg]	12.750	14.300	16.050	12.850	14.700	16.150
overall weights maximal [kg]	16.550	18.100	19.850	16.650	18.500	19.950

Documentation: technical specification, instruction sheet, maintenance manual, sheaving diagram, spare-parts list, safety instructions.