

# STEIN-diaphragm-wall-grab K 80

length 10,00 m

for the Wall thickness 800 / 1000 / 1200 mm



with wire-rope-pulleys  $\varnothing$  500 mm for wire-rope  $\varnothing$  24 - 28 mm  
two double sheaves and one single sheave

The diaphragm wall grab is low in maintenance and is subjected to the safety regulation VCB 9a for handling of loads.



The cutting edges of the grab jaws are made of Hardox steel 450 and were especially hardened. Easy mounting of the grab jaws for excavation widths 800/1000/1200 mm. All the grab teeth as well as all the wire rope pulleys are quickly exchangeable due to their construction as ready to use components.

Paintwork: aluminium coloured rust protection coating.

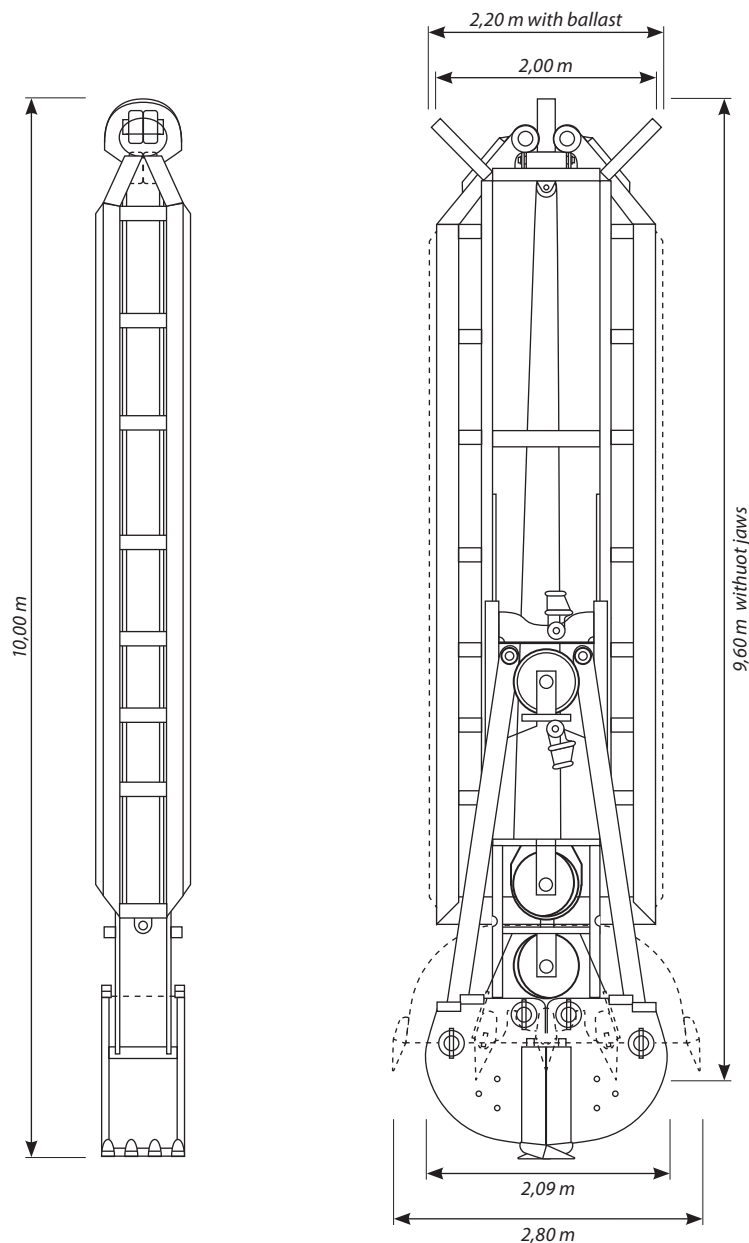

## MFS Maschinenfabrik GmbH & Co KG

### Production

Phone + 49 (0) 4421 1434 0  
 Fax + 49 (0) 4421 3034 81  
 E-mail info@mfs-mafa.de  
 Address Langeoogstr. 13  
 26384 Wilhelmshaven | Germany

### Sale

Phone + 49 (0) 2323 9266 0  
 Fax + 49 (0) 2323 9266 25  
 E-mail kendlik@stein-ht.de  
 Address Schnittstr. 6  
 44653 Herne | Germany

grab - body [kg]	8.700		
extension 800 - 1000 mm [kg]	3.800		
light extension 800 - 1000 mm [kg]	1.050		
light extension 800 - 1200 mm [kg]	2.000		
jaws opening [mm]	2800		
jaws width [mm]	800	1000	1200
jaws weight [kg]	2.100	2.700	3.300
overall weights minimal [kg]	10.800	12.450	14.000
overall weights maximal [kg]	14.600	16.250	17.800

Documentation: technical specification, instruction sheet, maintenance manual, sheaving diagram, spare-parts list, safety instructions.